


SERIES # 2800 HORIZONTAL SLIDER



SPECIFICATIONS

SERIES 2800 HAS 1/2" AIR SPACE INSULATED GLASS	
INSIDE WET DROP GLAZED	
THERMALLY BROKEN FRAME AND VENT	
INSIDE FRAME DIMENSION	HORIZONTAL: CALL SIZE - 1/2"
	VERTICAL: CALL SIZE - 1/2"
ROUGH OPENING	HORIZONTAL: CALL SIZE
	VERTICAL: CALL SIZE
MINIMUM SIZE I.F.D.	23 1/2" X 11 1/2"
MAXIMUM SIZE I.F.D.	72" X 72"
SIZE TESTED: AAMA/NWDA 101/I.S. 2-97 HS-R30-72x72	
GLASS SIZE	HORIZONTAL: (CALL SIZE/2) - 2 5/16"
	VERTICAL: CALL SIZE - 4 1/2"
MAXIMUM OVERALL GLASS THICKNESS:	7/8"
FINISHED SCREEN SIZE	HORIZONTAL: (CALL SIZE/2) - 5/8"
	VERTICAL: CALL SIZE - 2 3/4"
U-VALUE:	.44 (WITH LOW-E GLASS)
SHGC:	.31 (WITH LOW-E GLASS AND WITH MUNTINS)
STC:	27 (DSB EXT. GLASS/1/2 SPACER/SSB INT. GLASS)
HALF SCALE	DATE: 10/05/05
DRAWN BY: FA	2800HS.DWG

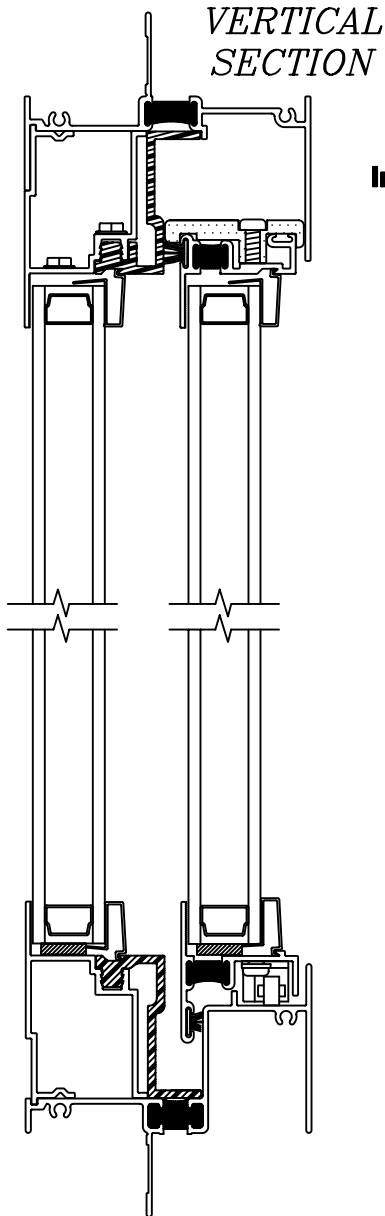