


SERIES # 6000 HORIZONTAL SLIDER

*VERTICAL
SECTION*

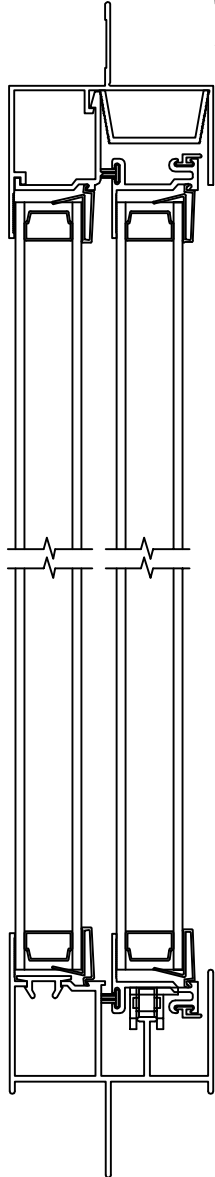


Inside

SPECIFICATIONS

ADVANCED PERFORMANCE HORIZONTAL SLIDER	
SERIES 6000 HAS 1/2" AIR SPACER INSULATED GLASS	
INSIDE WET DROP GLAZED	
INSIDE FRAME DIMENSION	HORIZONTAL: CALL SIZE - 1/2"
	VERTICAL: CALL SIZE - 1/2"
ROUGH OPENING	HORIZONTAL: CALL SIZE
	VERTICAL: CALL SIZE
MINIMUM SIZE I.F.D.	23 1/2" X 11 1/2"
MAXIMUM SIZE I.F.D.	72" X 72"
SIZE TESTED: AAMA/NWDA 101/I.S. 2-97 HS-R20 72 x 72	
SIZE TESTED: AAMA/NWDA 101/I.S. 2-97 HS-R30 72 x 60	
GLASS SIZE	HORIZONTAL: (CALL SIZE/2) - 2 1/16"
	VERTICAL: CALL SIZE - 3"
MAXIMUM OVERALL GLASS THICKNESS: 3/4"	
FINISHED SCREEN SIZE	HORIZONTAL: (CALL SIZE/2) - 3/4"
	VERTICAL: CALL SIZE - 3"
U-VALUE: .52 (WITH LOW-E GLASS AND MUNTINS)	
SHGC: .33 (WITH LOW-E GLASS AND WITH MUNTINS)	
STC: 25 (DSB EXT. GLASS/1/2 SPACER/SSB INT. GLASS)	
STC: 27 (3/16 EXT. GLASS/1/2 SPACER/SSB INT. GLASS)	
HALF SCALE	DATE: 7/27/04
DRAWN BY: FA	6000HS.DWG

*HORIZONTAL
SECTION*

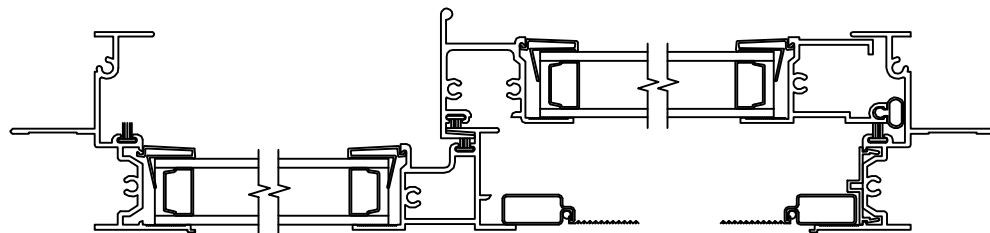

Inside